

Fiber Termination Panel (FTP24)

Fiber Termination Panel (FTP24) Series

The FTP24 Series is a 1U fiber cable management panel for termination and splicing. This fiber panel can be used on the terminal of the optical cables, different types and structures, the diameter of which are within 18mm(ϕ) tray.




Technical Specifications :

- External Size: 430 x 300 x 1U (LxWxH)
- Weight: 4.1Kg
- Optical Fiber winding radius: ≥ 40 mm
- Working temperature: $-40^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- Lateral pressure resistance: 500N
- Shock resistance: 750N

Features:

- Available for FC, SC, LC adapter types
- The body make use of cold rolling steel sheet .Strong adhesive force, artistic and durable.
- 19" rack mount is available.
- Transparent front window for observation.
- Distinctive design of 1-2 cable entrance and fiber exit of 1-24cores assures flexibility.
- Swing-out drawer design prevent in-coming cable damage while termination.

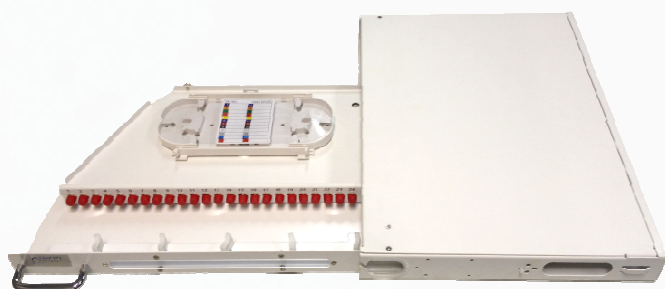

Ordering Information

Part Number	Max Capacity	Dimension
FTP24-XX	24	430 x 300 x 44.5

XX - Adapter Type – SC, FC, LC